



BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
VOLTS OPTIONS	☐ 115V 1-PHASE ☐ 230V 1-PHASE
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

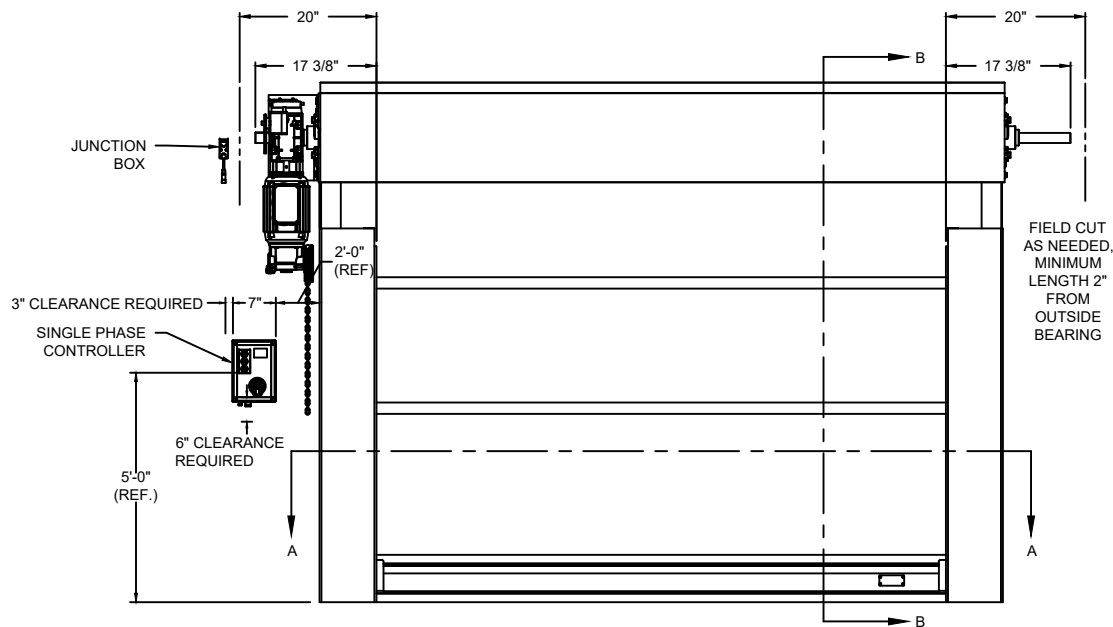

ELEVATION

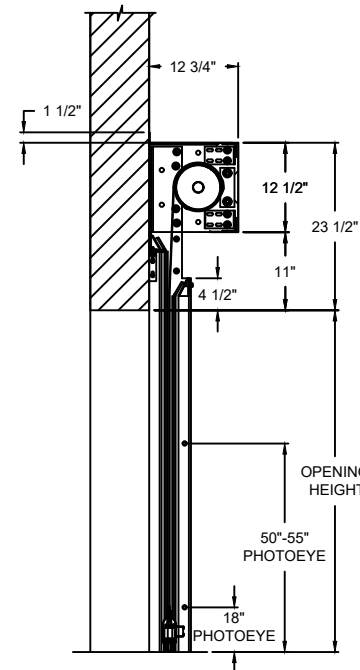

SECTION B-B

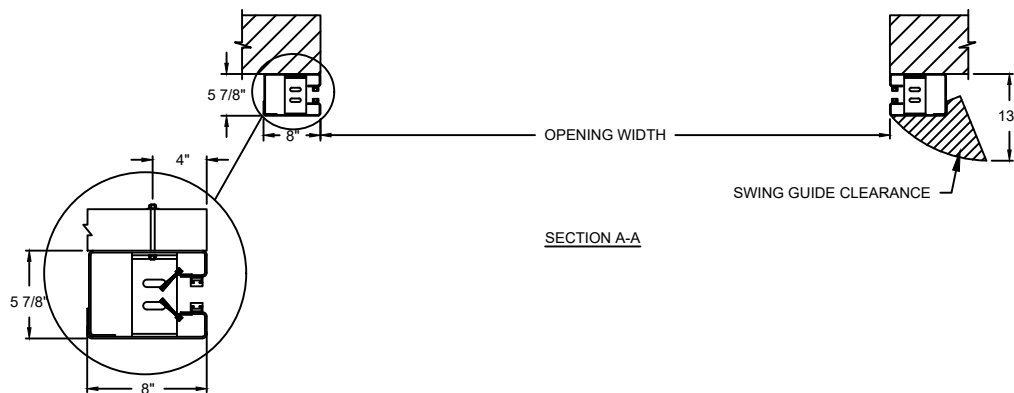

SECTION A-A

**DETAIL
JAMB FASTENERS**


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
992	16'	15'

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH	1. WINDLOAD 4 P.S.F ULTIMATE @ 16" WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
INTERIOR CURTAIN	2 THIN LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
EXT. / INT. CURTAIN	2 LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

992 STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
VOLTS OPTIONS	☐ 115V 1-PHASE ☐ 230V 1-PHASE
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

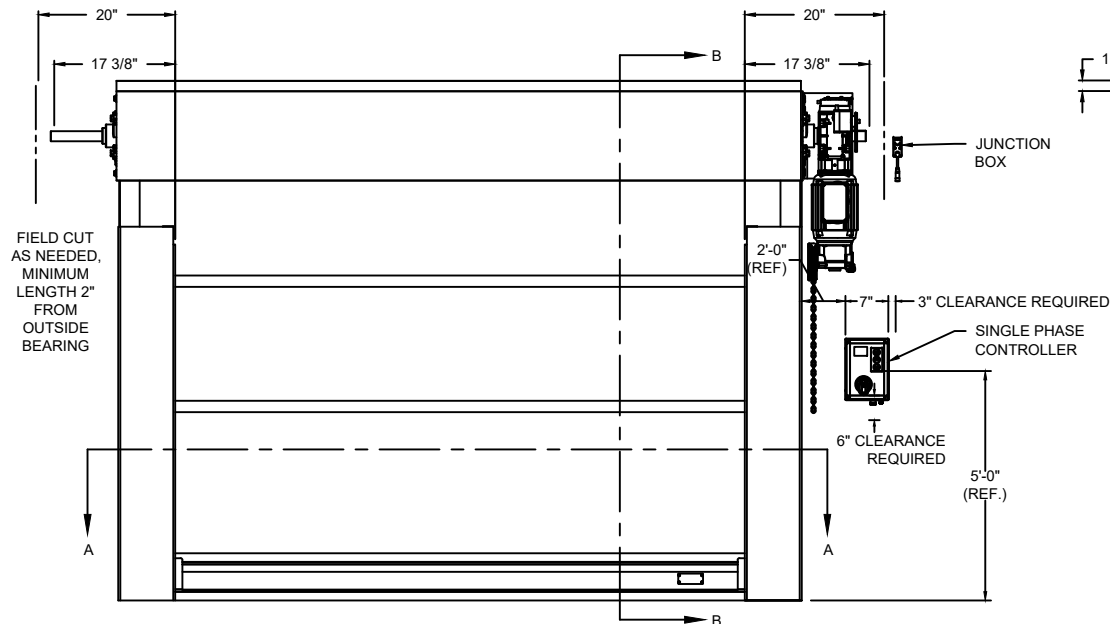

ELEVATION

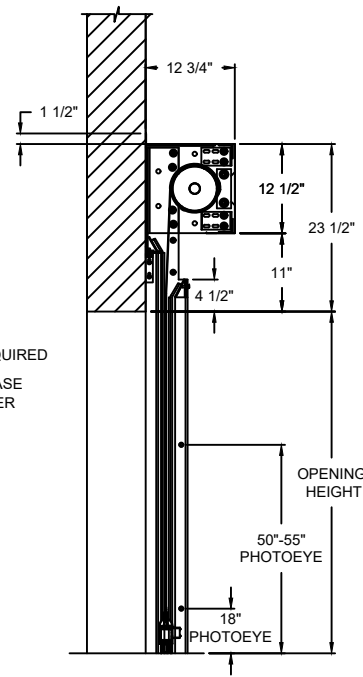

SECTION B-B

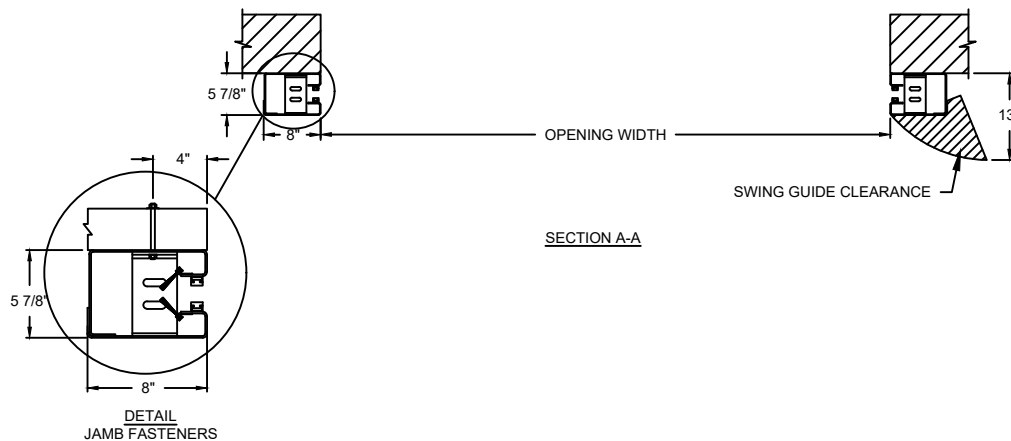

SECTION A-A


**DETAIL
JAMB FASTENERS**

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH	1. WINDLOAD 4 P.S.F ULTIMATE @ 16" WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
INTERIOR CURTAIN	2 THIN LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
EXT. / INT. CURTAIN	2 LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

992 STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. POWERHEAD DOOR
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS

OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING




TRANSFORMER

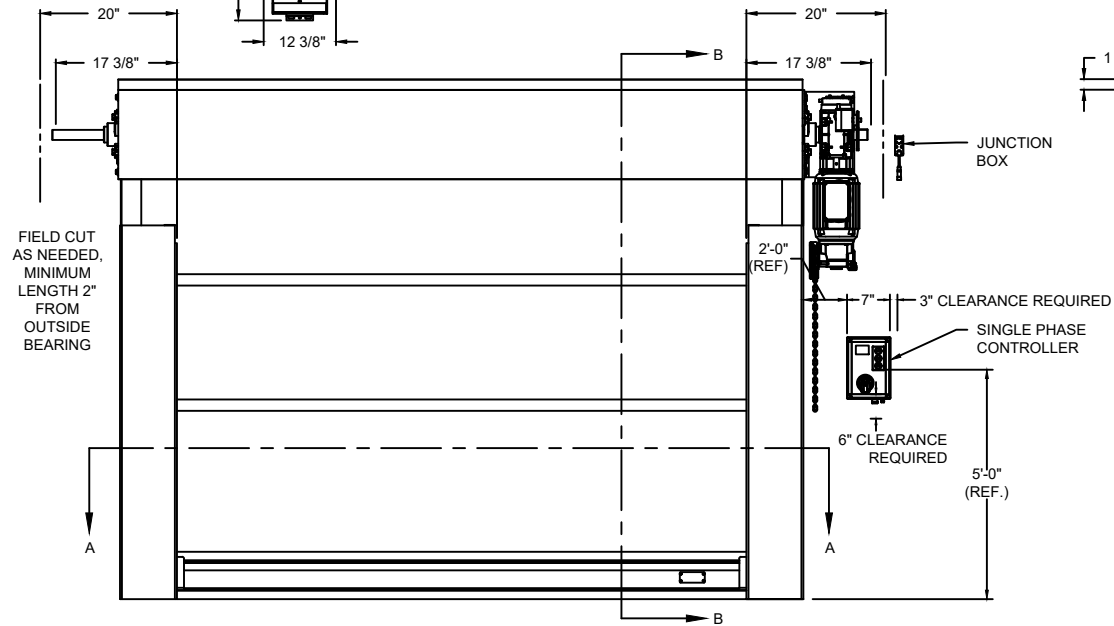


ELEVATION

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
992	16'	15'

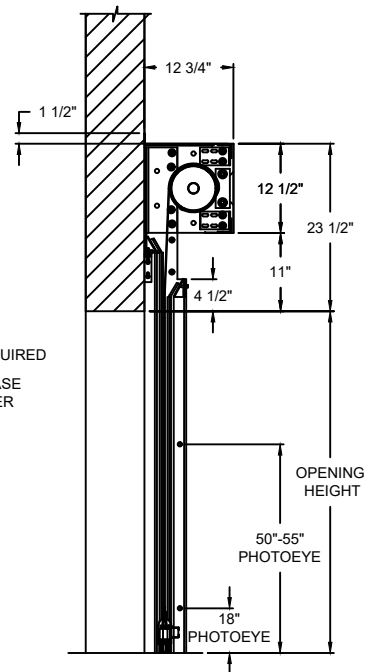

SECTION B-B

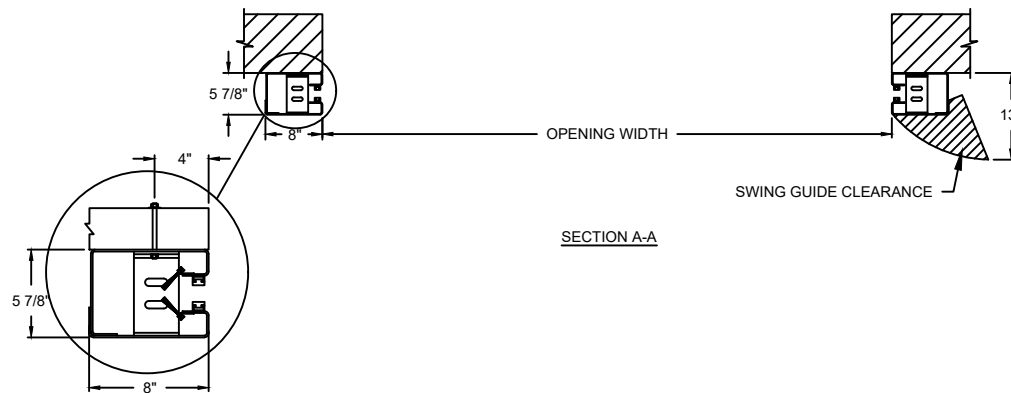

SECTION A-A


**DETAIL
JAMB FASTENERS**

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH 208V 1-PHASE VIA TRANSFORMER (190-270V RANGE)	1. WINDLOAD 4 P.S.F ULTIMATE @ 16" WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
INTERIOR CURTAIN	2 THIN LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
EXT. / INT. CURTAIN	2 LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

992 STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. POWERHEAD DOOR
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

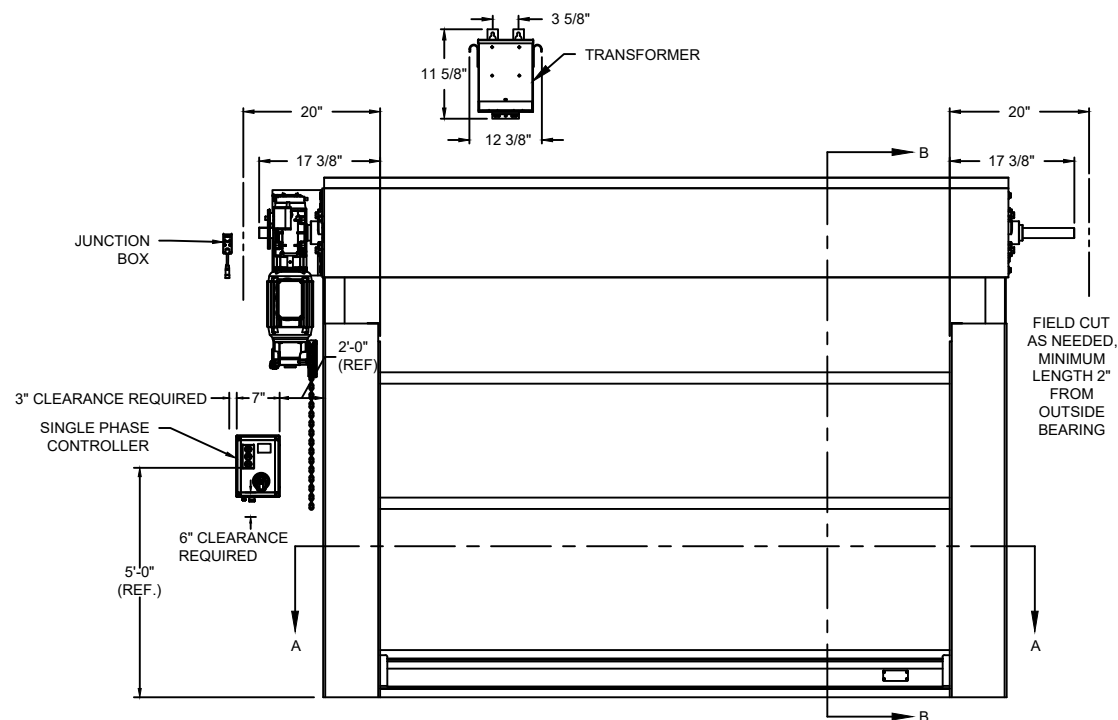

ELEVATION

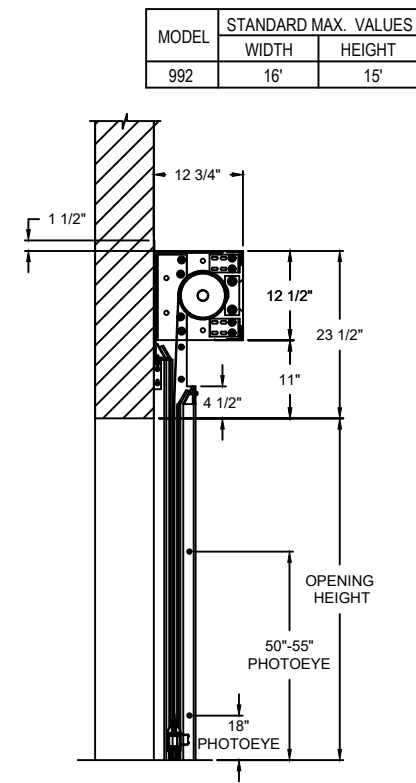

SECTION B-B

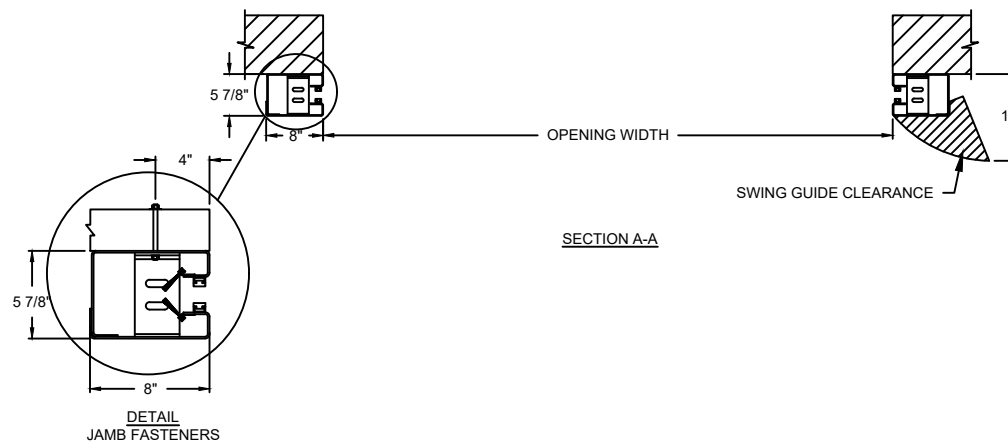

SECTION A-A

DETAIL
JAMB FASTENERS

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH 208V 1-PHASE VIA TRANSFORMER (190-270V RANGE)	1. WINDLOAD 4 P.S.F ULTIMATE @ 16" WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
INTERIOR CURTAIN	2 THIN LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
EXT. / INT. CURTAIN	2 LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		

RAPIDFLEX®



992 STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	




OPTIONS

OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

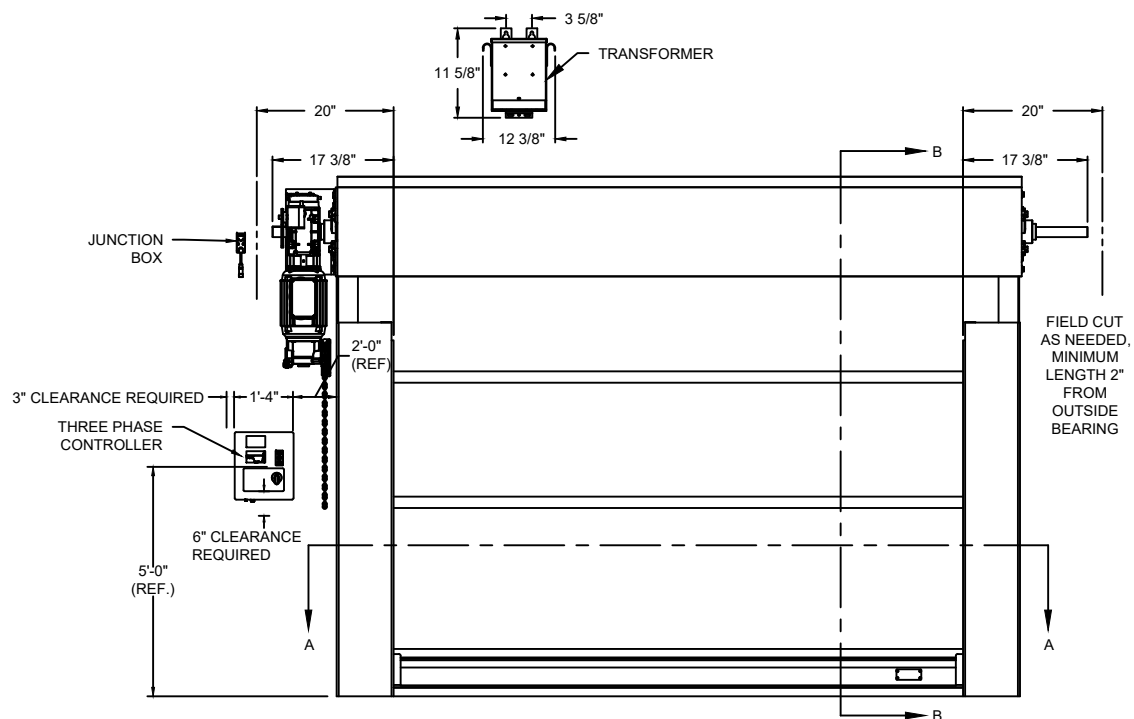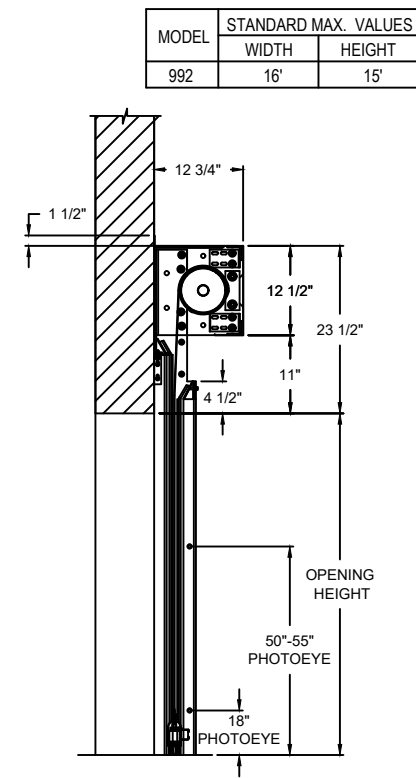ELEVATION

SECTION B-B

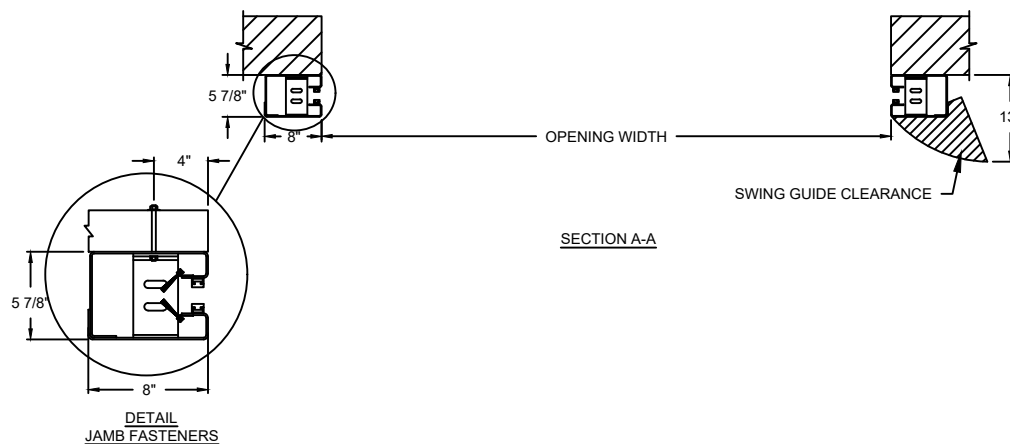


MODEL	STANDARD MAX. VALUE	
	WIDTH	HEIGHT
992	16'	15'


RAPIDFLEX®

992 STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

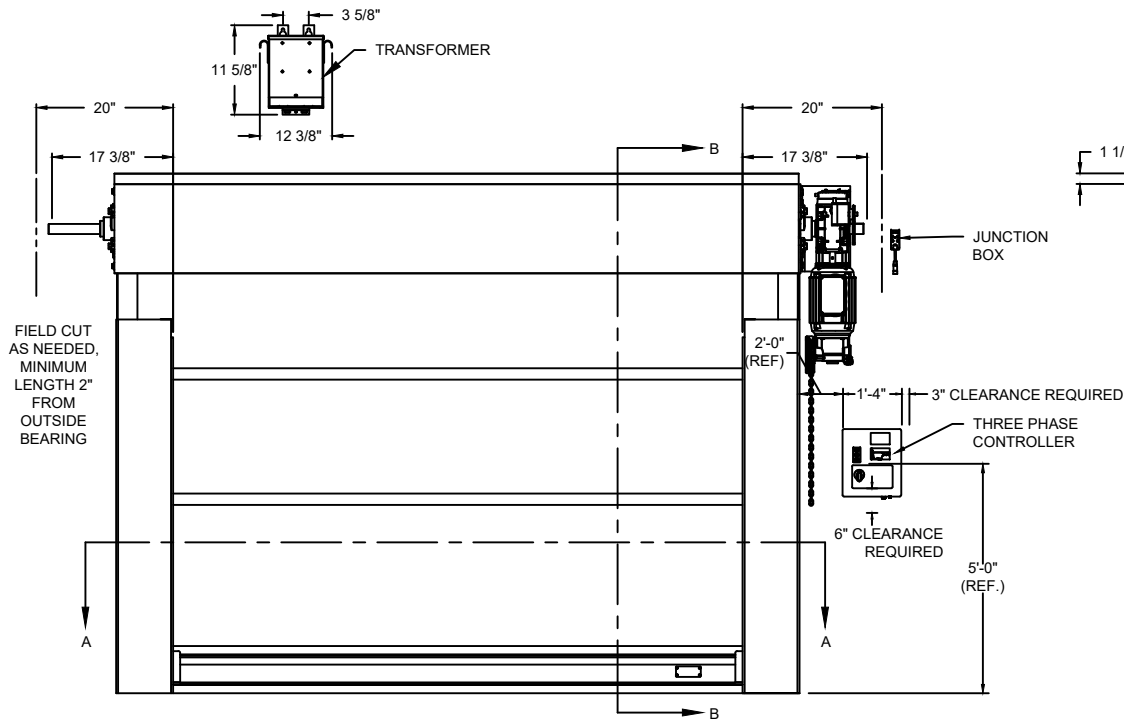

ELEVATION

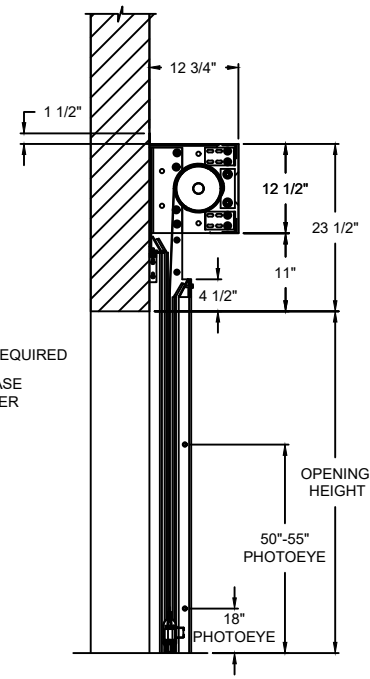

SECTION B-B

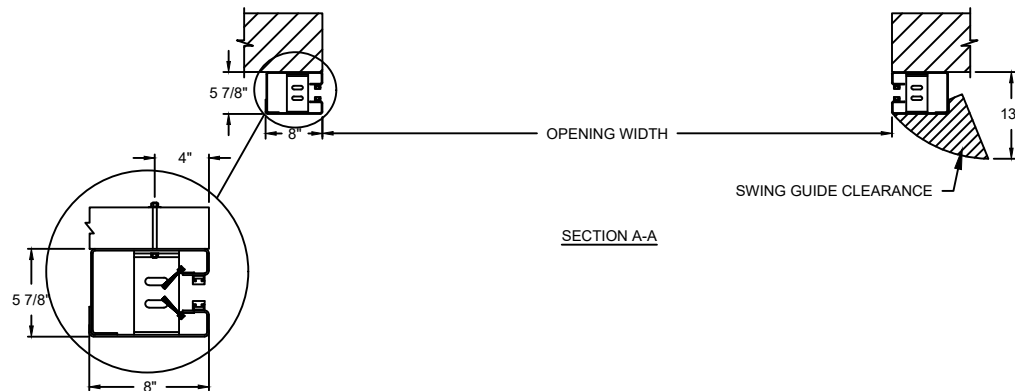

SECTION A-A

DETAIL
JAMB FASTENERS


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH 208V 3-PHASE VIA TRANSFORMER (190-270V RANGE)	1. WINDLOAD 4 P.S.F ULTIMATE @ 16" WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
INTERIOR CURTAIN	2 THIN LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
EXT. / INT. CURTAIN	2 LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
992	16'	15'


RAPIDFLEX®

992 STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. POWERHEAD DOOR
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
VOLTS OPTIONS	☐ 230V 3-PHASE ☐ 460V 3-PHASE
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

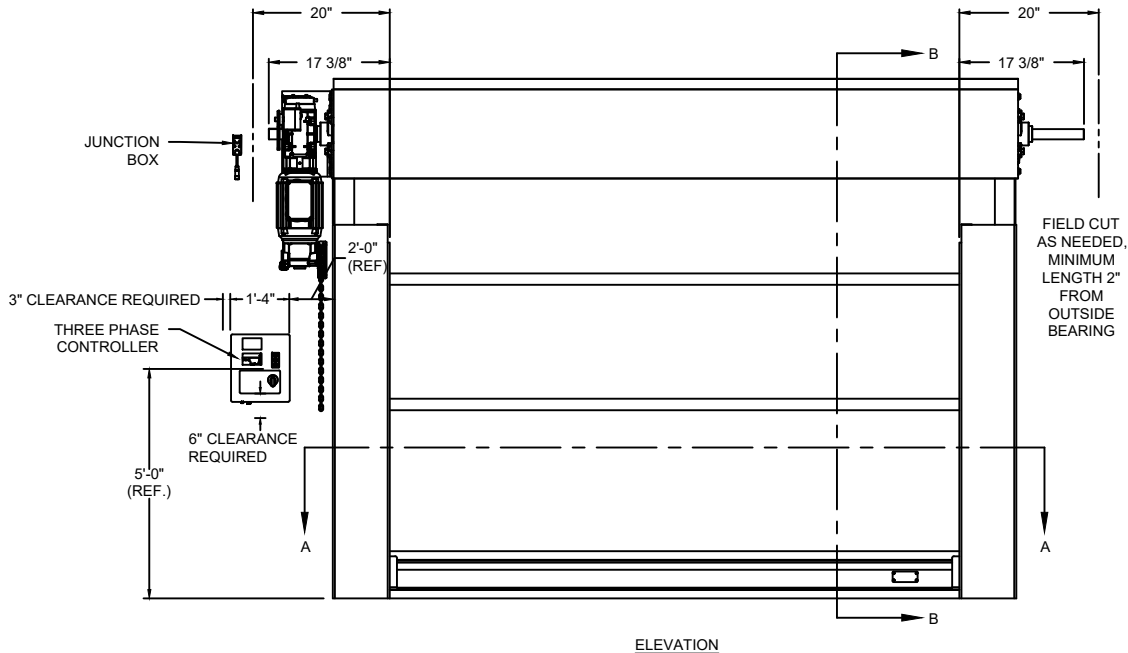

ELEVATION

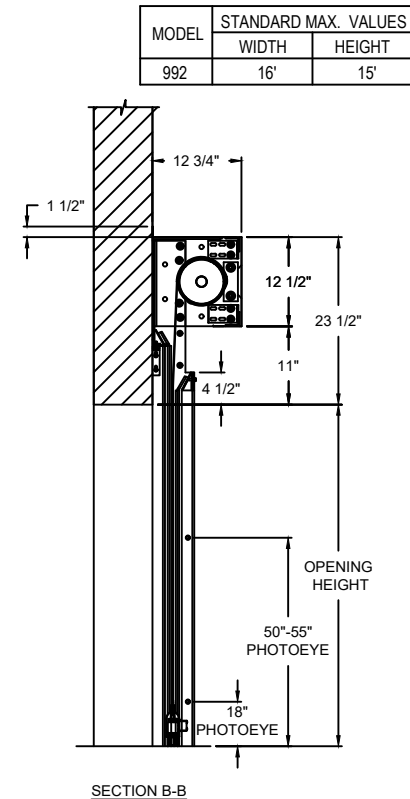

SECTION B-B

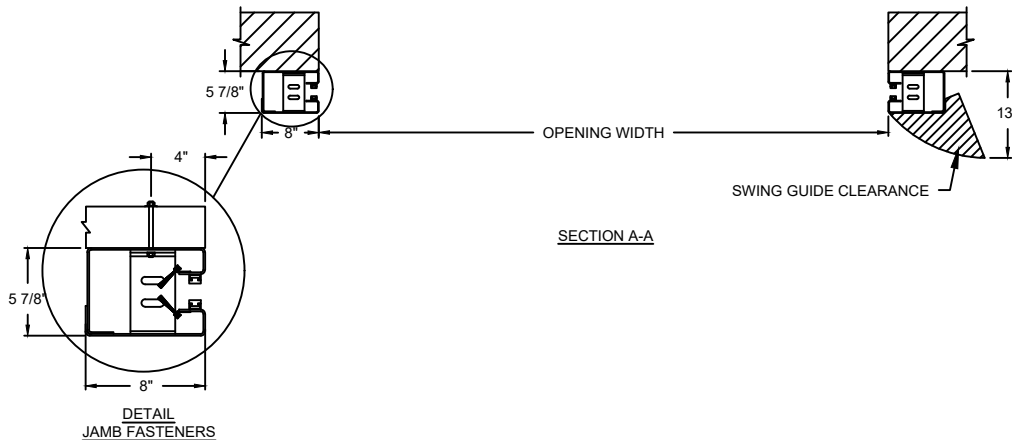

SECTION A-A


**DETAIL
JAMB FASTENERS**

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH	1. WINDLOAD 4 P.S.F ULTIMATE @ 16" WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
INTERIOR CURTAIN	2 THIN LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
EXT. / INT. CURTAIN	2 LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

992 STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
VOLTS OPTIONS	☐ 230V 3-PHASE ☐ 460V 3-PHASE
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

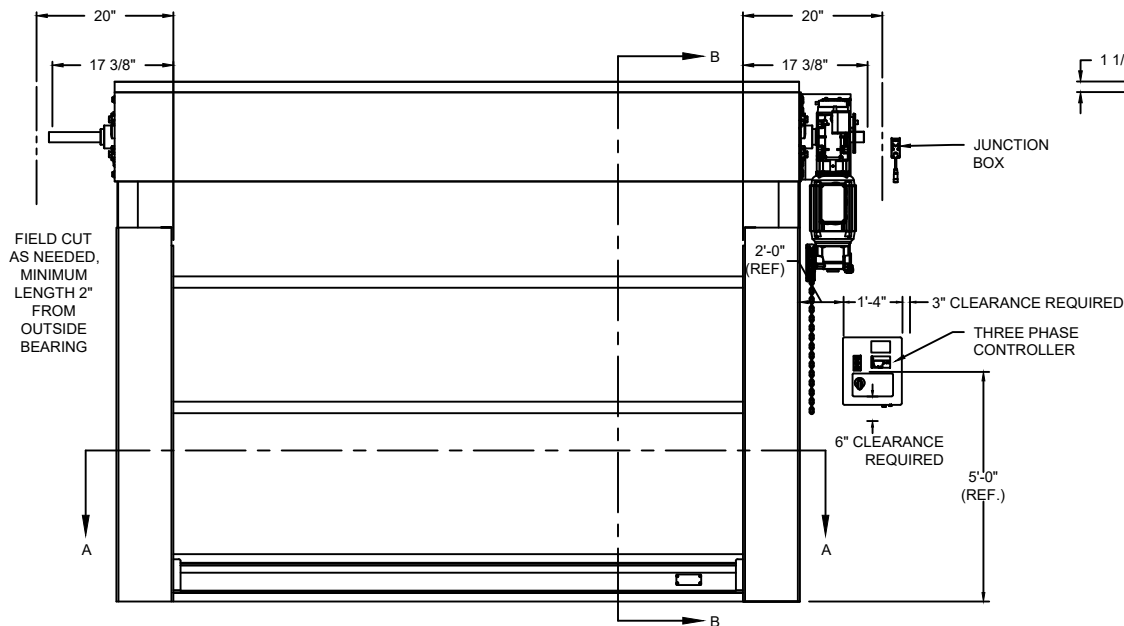

ELEVATION

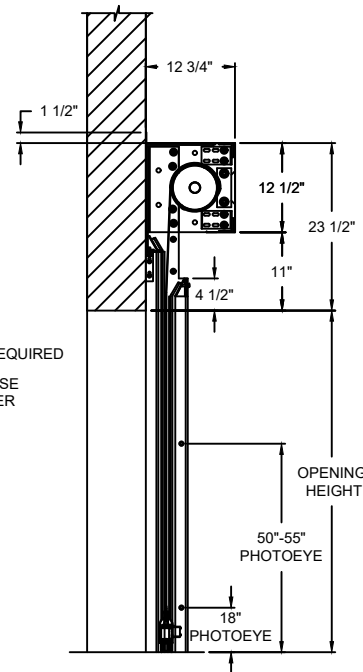

SECTION B-B

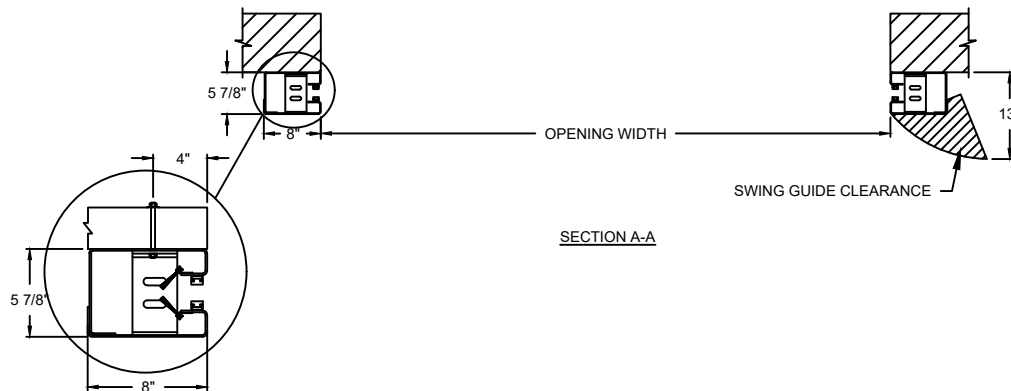

SECTION A-A

DETAIL
JAMB FASTENERS


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH	1. WINDLOAD 4 P.S.F ULTIMATE @ 16" WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
INTERIOR CURTAIN	2 THIN LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
EXT. / INT. CURTAIN	2 LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
992	16'	15'


RAPIDFLEX®

992 STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

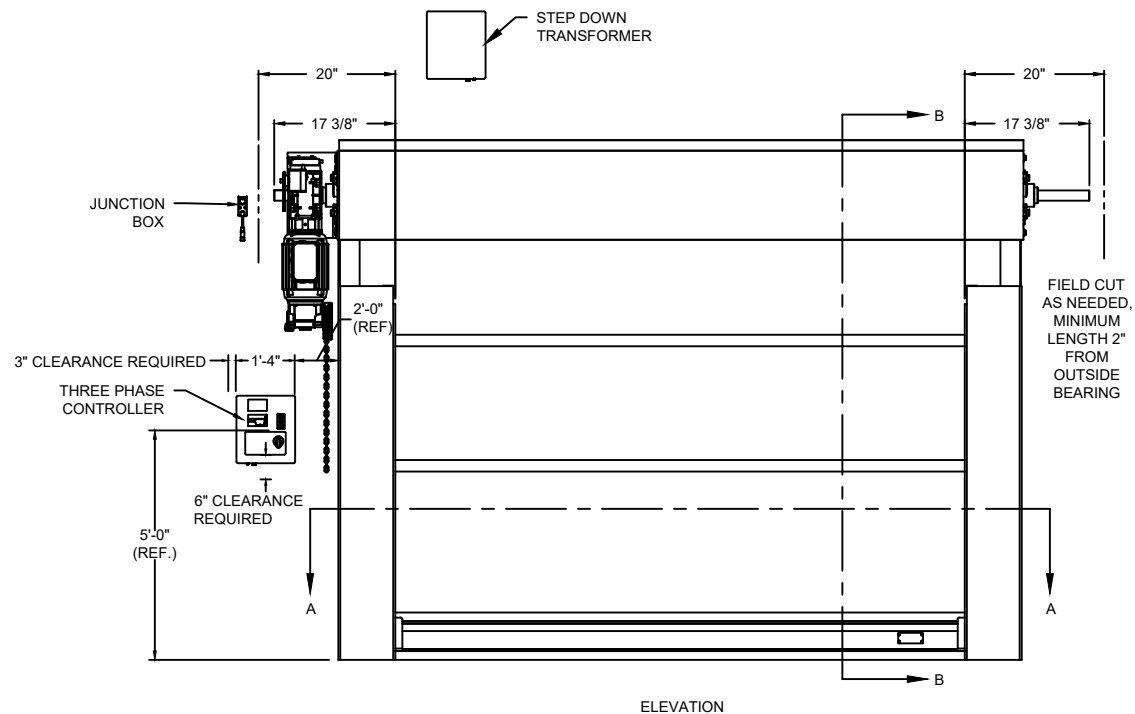

ELEVATION

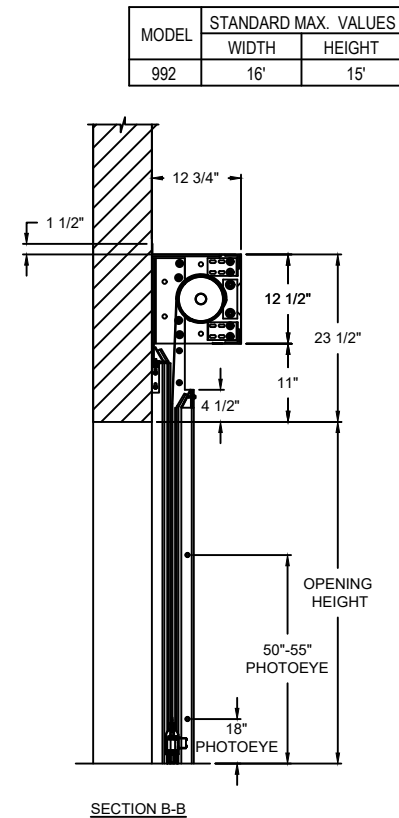

SECTION B-B

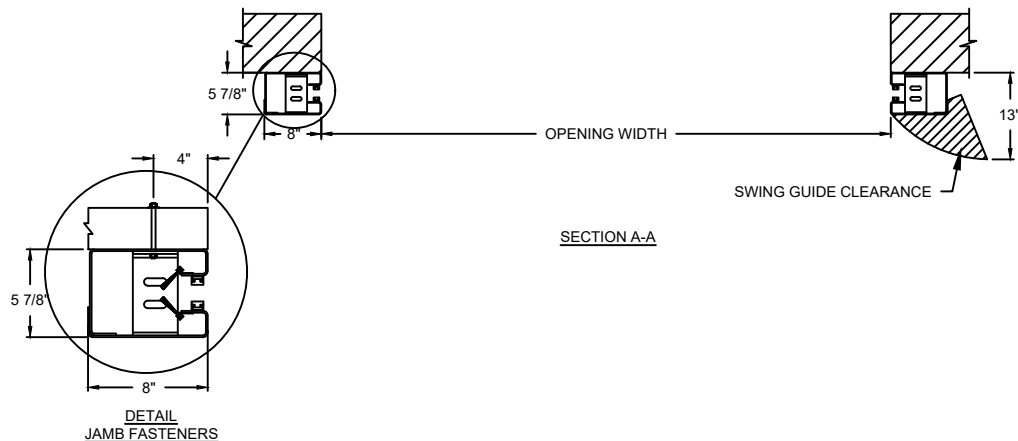

SECTION A-A


**DETAIL
JAMB FASTENERS**

RAPIDFLEX®


992 STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. POWERHEAD®
SHEET	BY:	

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH 575V 3-PHASE	1. WINDLOAD 4 P.S.F ULTIMATE @ 16" WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
INTERIOR CURTAIN	2 THIN LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
EXT. / INT. CURTAIN	2 LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		




BOTTOM BAR DETAIL



STRUT DETAIL


OPTIONS

OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

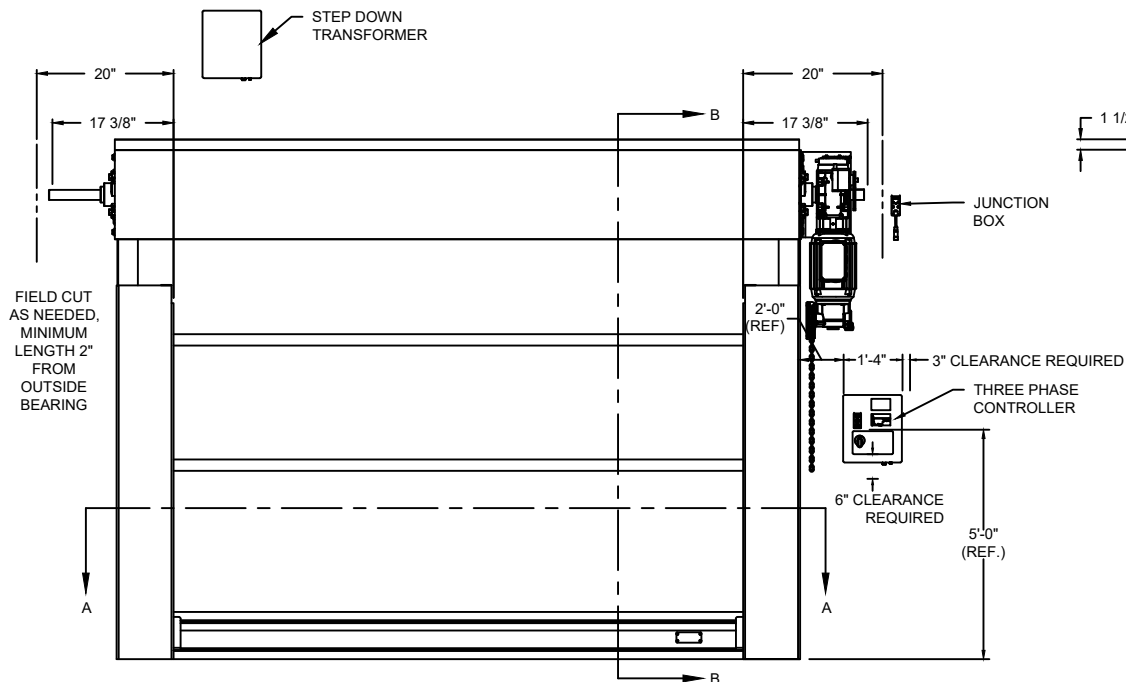


ELEVATION

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
992	16'	15'

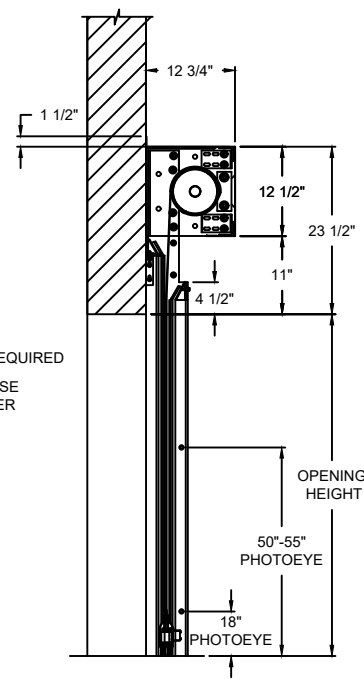

SECTION B-B

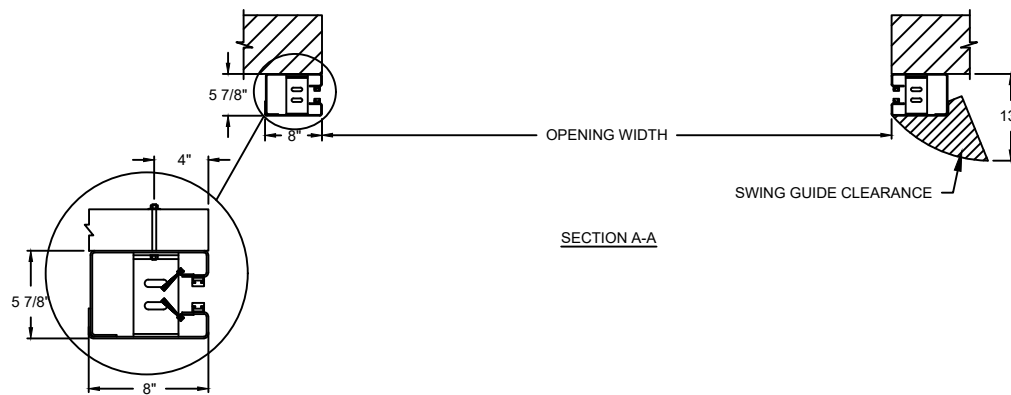

SECTION A-A

DETAIL
JAMB FASTENERS

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH 575V 3-PHASE	1. WINDLOAD 4 P.S.F ULTIMATE @ 16" WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
INTERIOR CURTAIN	2 THIN LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
EXT. / INT. CURTAIN	2 LAYER PVC COATED POLYESTER WITH 1 LAYER POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		

RAPIDFLEX®


992 STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	

STRUT QUANTITY WILL VARY
BASED ON DOOR HEIGHT

OPENING HEIGHT	# OF STRUTS
UP TO 7'3"	1
7'4" TO 10'1"	2
10'2" TO 12'11"	3
13'0" TO 15'0"	4

992 WALL GUIDE NO SPLICE													
BUILD HEIGHT (FT)	BUILD HEIGHT (IN)	WALL GUIDE HEIGHT (IN)	NUMBER OF SLOTS	SLOT 1	SLOT 2	SLOT 3	SLOT 4	SLOT 5	SLOT 6	SLOT 7	SLOT 8	SLOT 9	SLOT 10
5	60	83	5	2.0	20.0	38.0	62.0	68.0					
5.5	66	89	5	2.0	23.0	44.0	68.0	74.0					
6	72	95	6	2.0	14.0	26.0	50.0	74.0	80.0				
6.5	78	101	6	2.0	17.0	32.0	56.0	80.0	86.0				
7	84	107	6	2.0	20.0	38.0	62.0	86.0	92.0				
7.5	90	113	6	2.0	23.0	44.0	68.0	92.0	98.0				
8	96	119	7	2.0	14.0	26.0	50.0	74.0	98.0	104.0			
8.5	102	125	7	2.0	17.0	32.0	56.0	80.0	104.0	110.0			
9	108	131	7	2.0	20.0	38.0	62.0	86.0	110.0	116.0			
9.5	114	137	7	2.0	23.0	44.0	68.0	92.0	116.0	122.0			
10	120	143	8	2.0	14.0	26.0	50.0	74.0	98.0	122.0	128.0		
10.5	126	149	8	2.0	17.0	32.0	56.0	80.0	104.0	128.0	134.0		
11	132	155	8	2.0	20.0	38.0	62.0	86.0	110.0	134.0	140.0		
11.5	138	161	8	2.0	23.0	44.0	68.0	92.0	116.0	140.0	146.0		
12	144	167	9	2.0	14.0	26.0	50.0	74.0	98.0	122.0	146.0	152.0	
12.5	150	173	9	2.0	17.0	32.0	56.0	80.0	104.0	128.0	152.0	158.0	
13	156	179	9	2.0	20.0	38.0	62.0	86.0	110.0	134.0	158.0	164.0	
13.5	162	185	9	2.0	23.0	44.0	68.0	92.0	116.0	140.0	164.0	170.0	
14	168	191	10	2.0	14.0	26.0	50.0	74.0	98.0	122.0	146.0	170.0	176.0
14.5	174	197	10	2.0	17.0	32.0	56.0	80.0	104.0	128.0	152.0	176.0	182.0
15	180	203	10	2.0	20.0	38.0	62.0	86.0	110.0	134.0	158.0	182.0	188.0

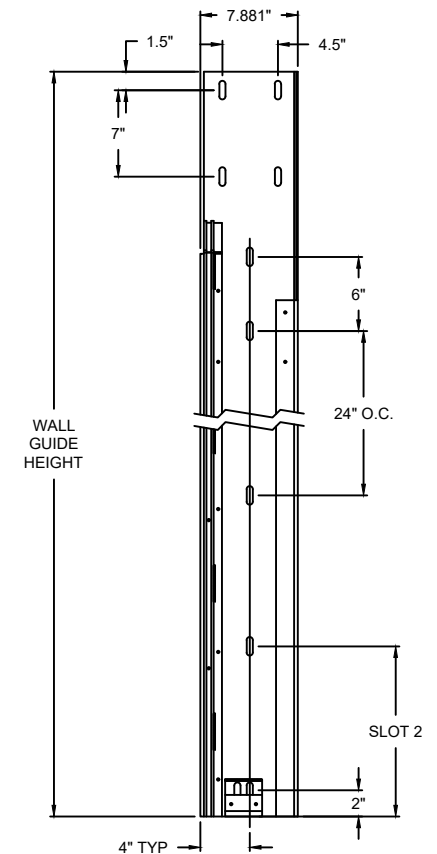

NO SPLICE JAMB DETAIL
SHOWING 5 SLOTS

RAPIDFLEX®

992 INTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	