



BOTTOM BAR DETAIL



STRUT DETAIL


OPTIONS

OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
VOLTS OPTIONS	☐ 115V 1-PHASE ☐ 230V 1-PHASE
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

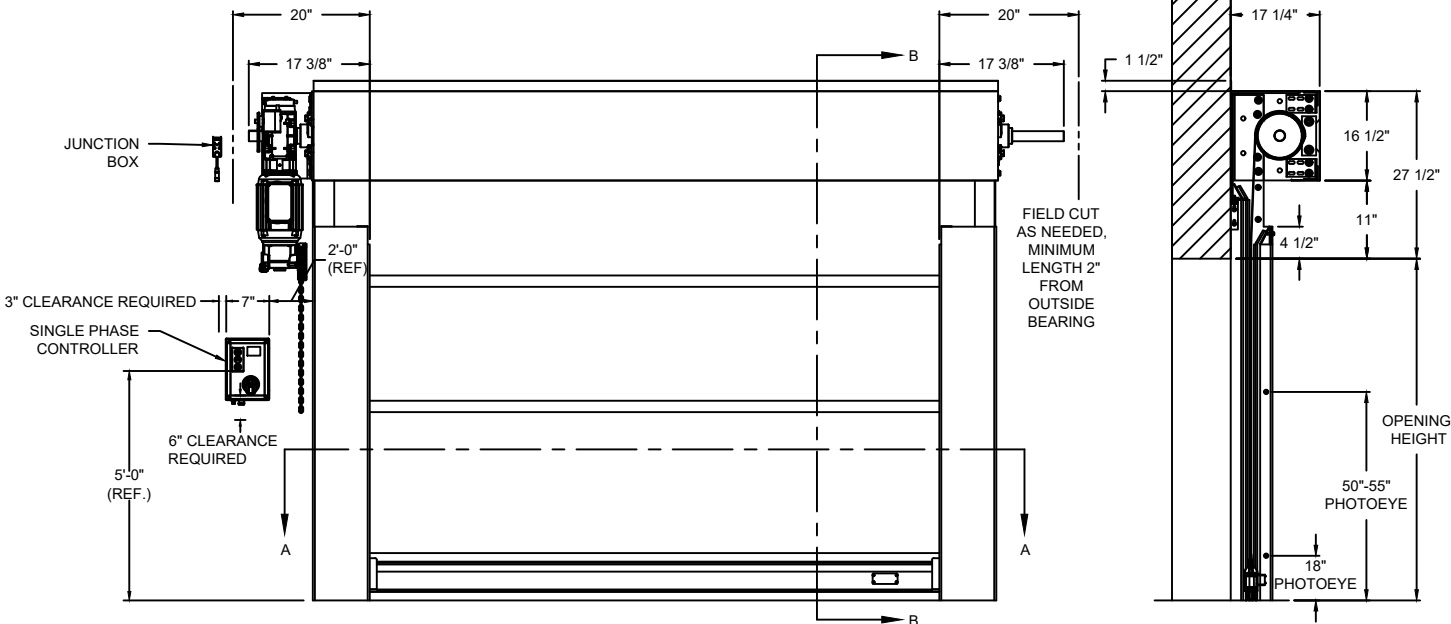

ELEVATION

SECTION B-B

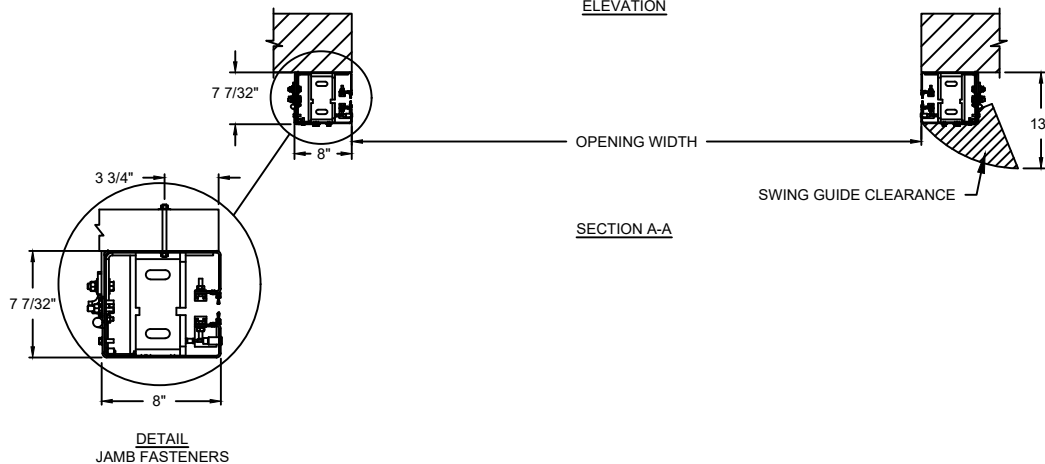

SECTION A-A

DETAIL
JAMB FASTENERS


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
993	20'	20'

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH	1. WINDLOAD 19 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



BOTTOM BAR DETAIL




STRUT DETAIL


OPTIONS

OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
VOLTS OPTIONS	☐ 115V 1-PHASE ☐ 230V 1-PHASE
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
993	20'	20'

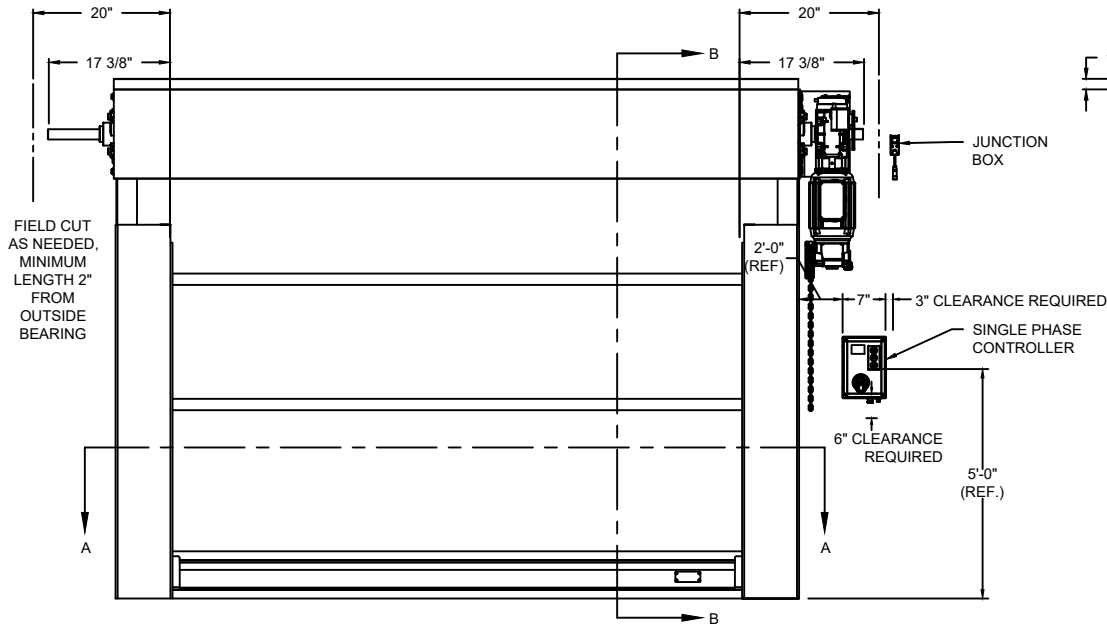

ELEVATION

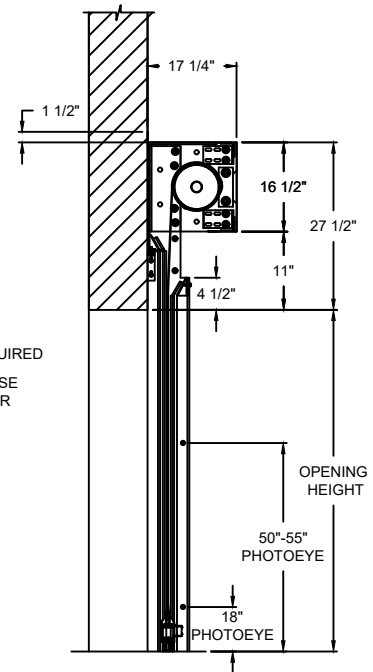

SECTION B-B

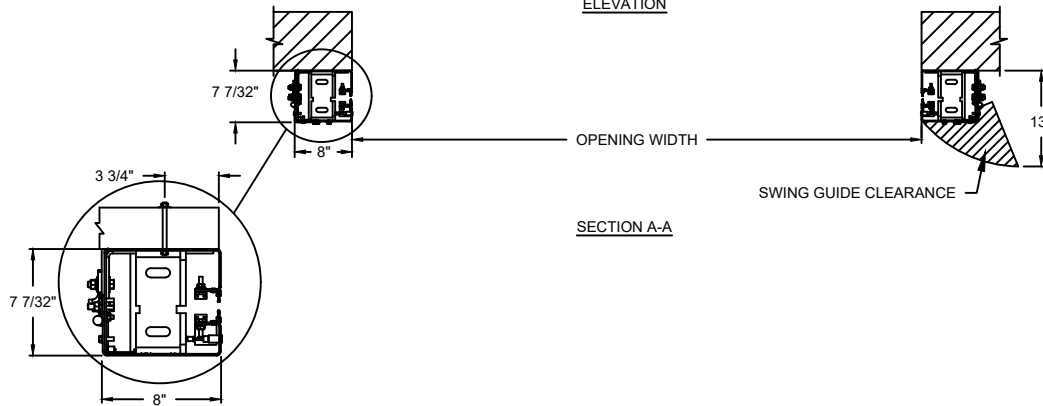

SECTION A-A


**DETAIL
JAMB FASTENERS**

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH	1. WINDLOAD 19 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. POWERHEAD DOOR
SHEET	BY:	



BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
993	20'	20'

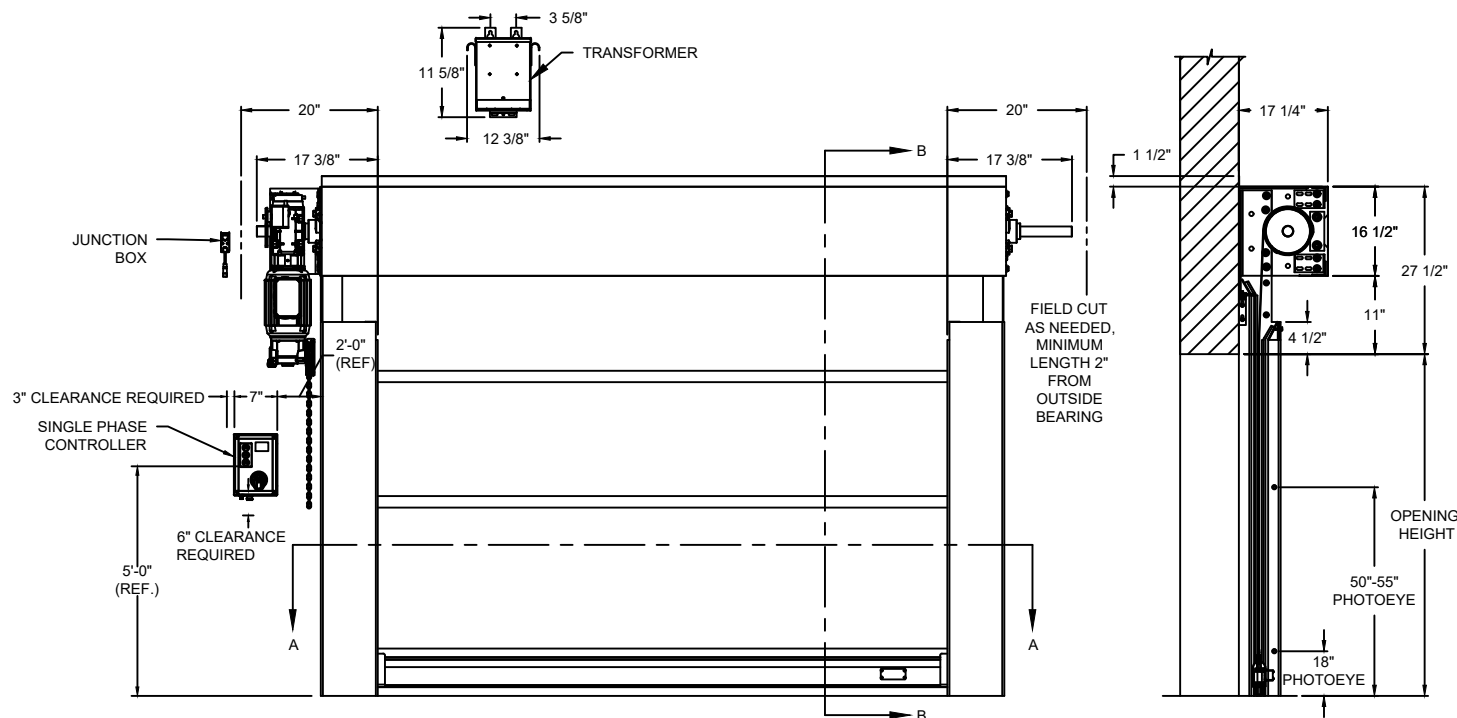

ELEVATION

SECTION B-B

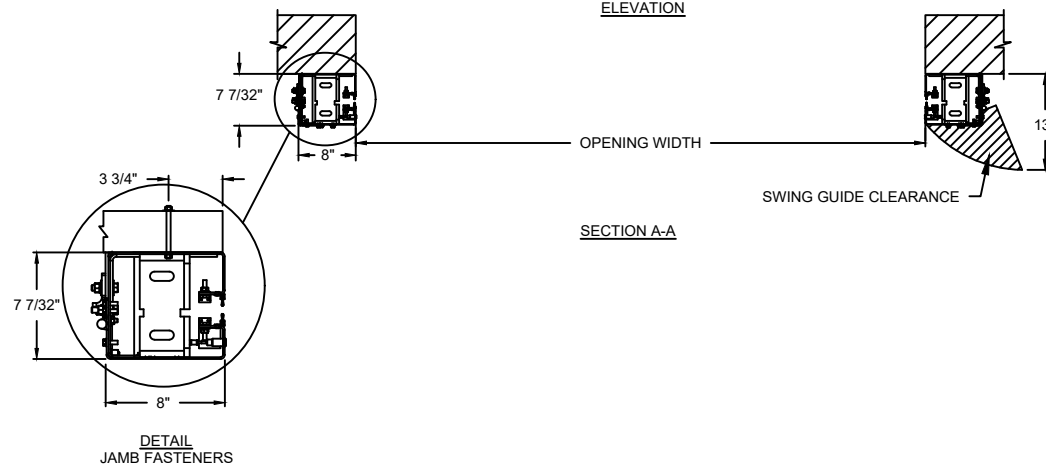

OPENING WIDTH

SWING GUIDE CLEARANCE

SECTION A-A

**DETAIL
JAMB FASTENERS**

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH 208V 1-PHASE VIA TRANSFORMER (190-270V RANGE)	1. WINDLOAD 19 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. POWERHEAD DOOR
SHEET	BY:	




OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING




COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH 208V 1-PHASE VIA TRANSFORMER (190-270V RANGE)	1. WINDLOAD 19 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		

993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	
SHEET	BY:	



BOTTOM BAR DETAIL





STRUT DETAIL

OPTIONS

OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
993	20'	20'

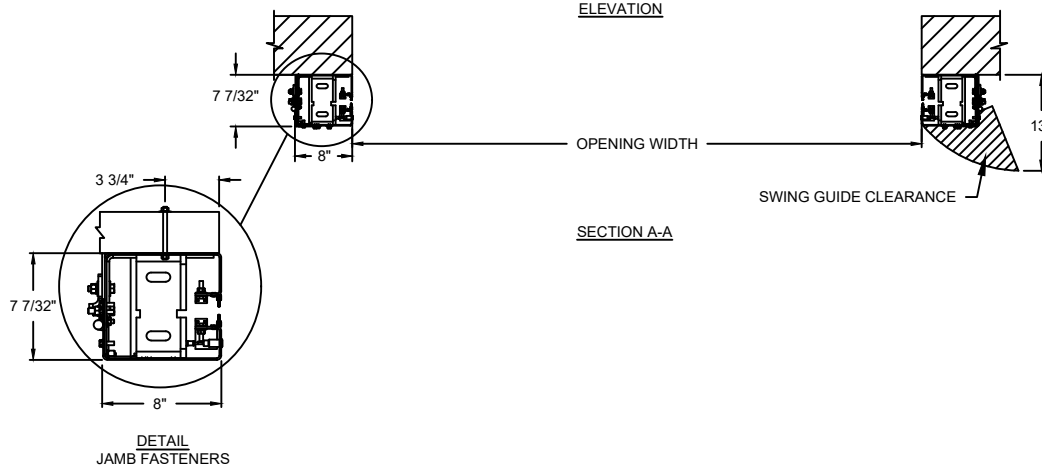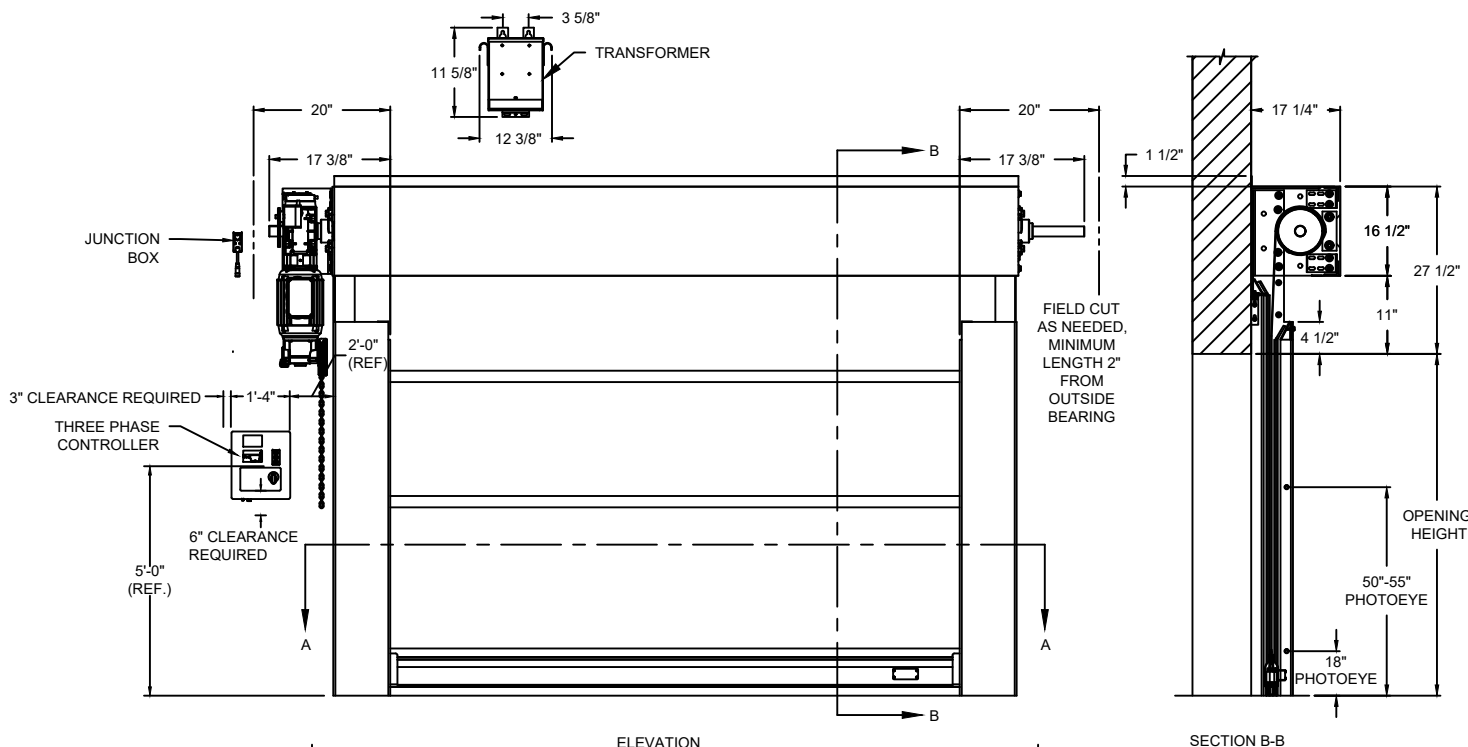


COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH 208V 3-PHASE VIA TRANSFORMER (190-270V RANGE)	1. WINDLOAD 19 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

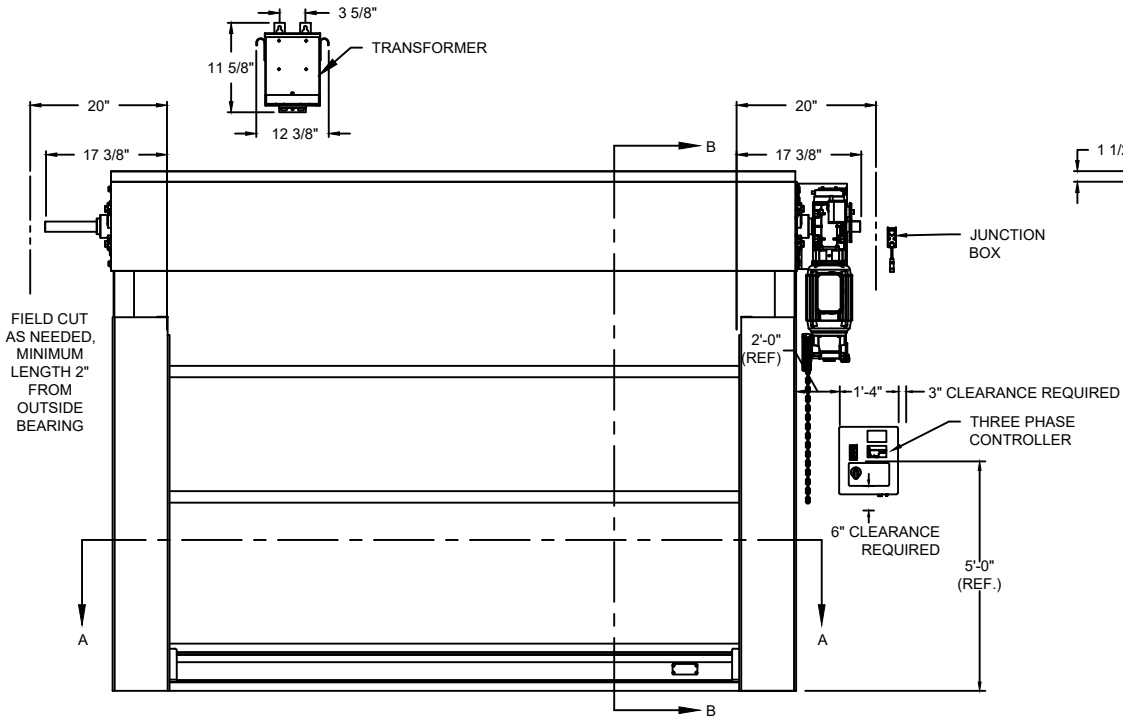

ELEVATION

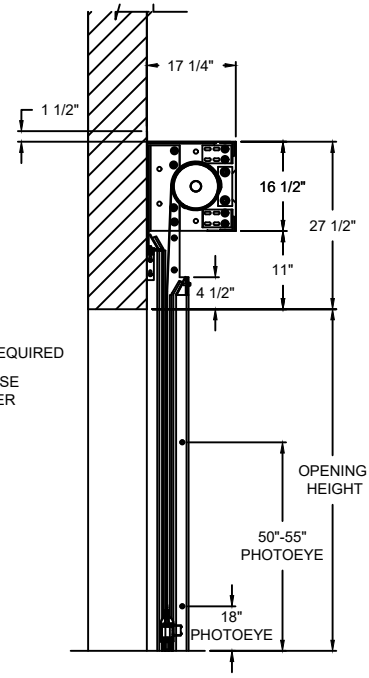

SECTION B-B

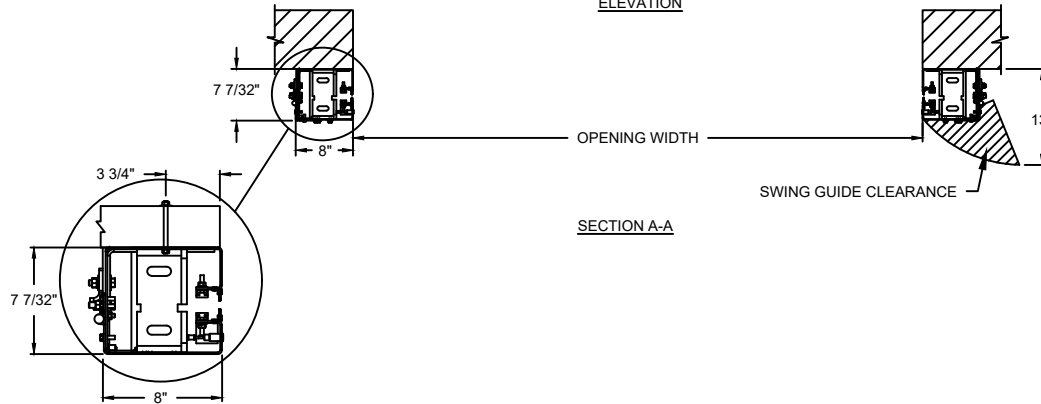

SECTION A-A


**DETAIL
JAMB FASTENERS**

RAPIDFLEX®


993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. POWERHEAD DOOR
SHEET	BY:	

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH 208V 3-PHASE VIA TRANSFORMER (190-270V RANGE)	1. WINDLOAD 19 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		



BOTTOM BAR DETAIL




STRUT DETAIL


OPTIONS

OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
VOLTS OPTIONS	☐ 230V 3-PHASE ☐ 460V 3-PHASE
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
993	20'	20'

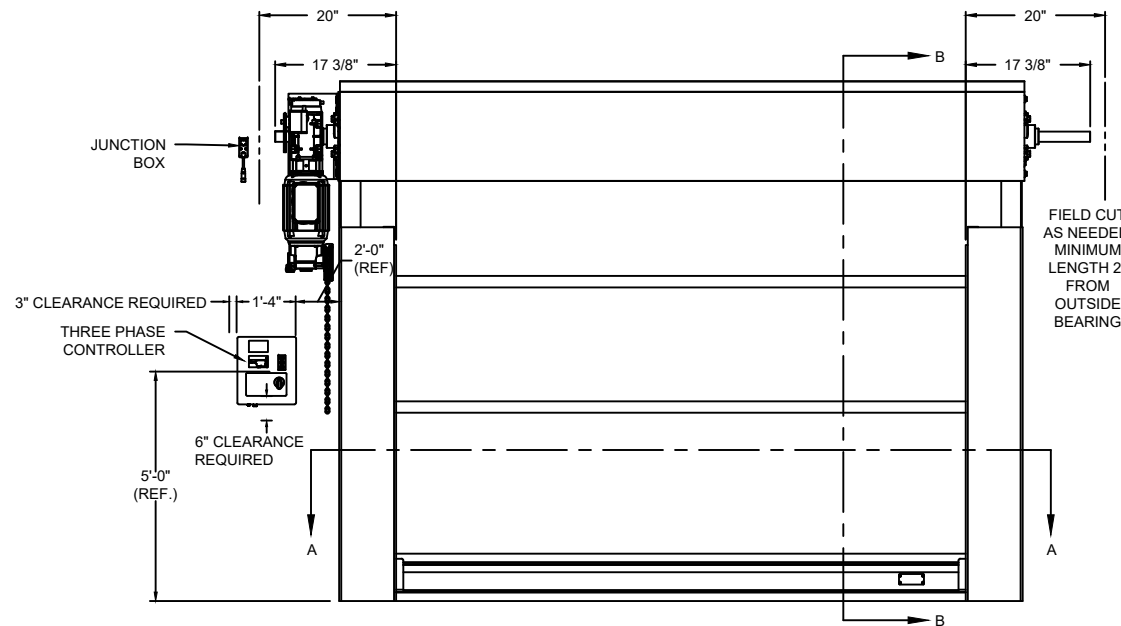

ELEVATION

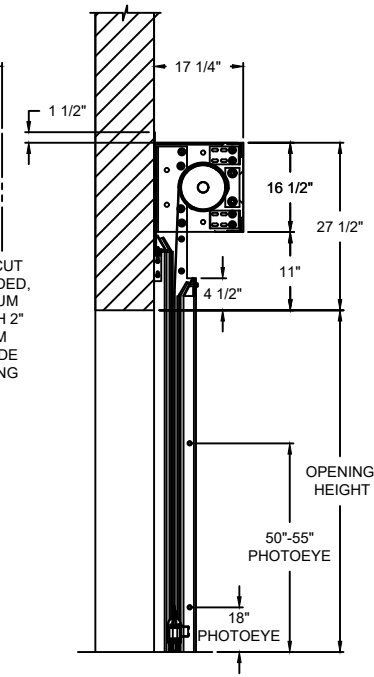

SECTION B-B

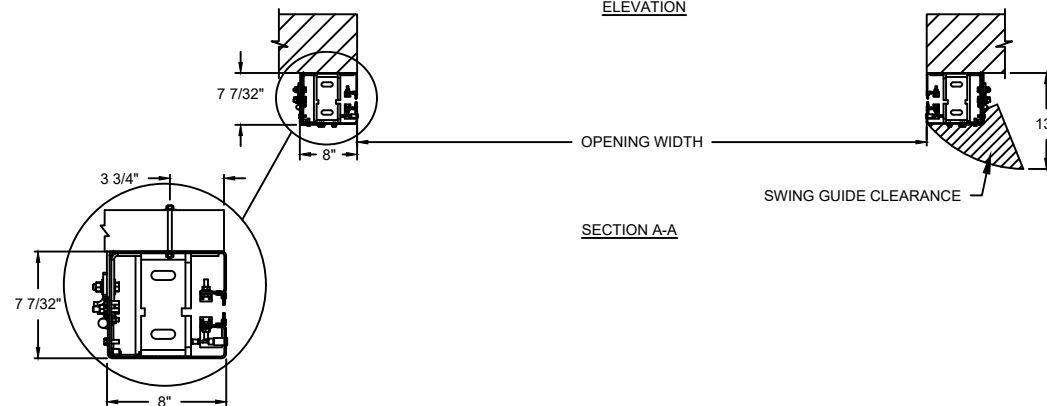

SECTION A-A


**DETAIL
JAMB FASTENERS**

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH	1. WINDLOAD 19 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



BOTTOM BAR DETAIL




STRUT DETAIL


OPTIONS

OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
VOLTS OPTIONS	☐ 230V 3-PHASE ☐ 460V 3-PHASE
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING


MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
993	20'	20'

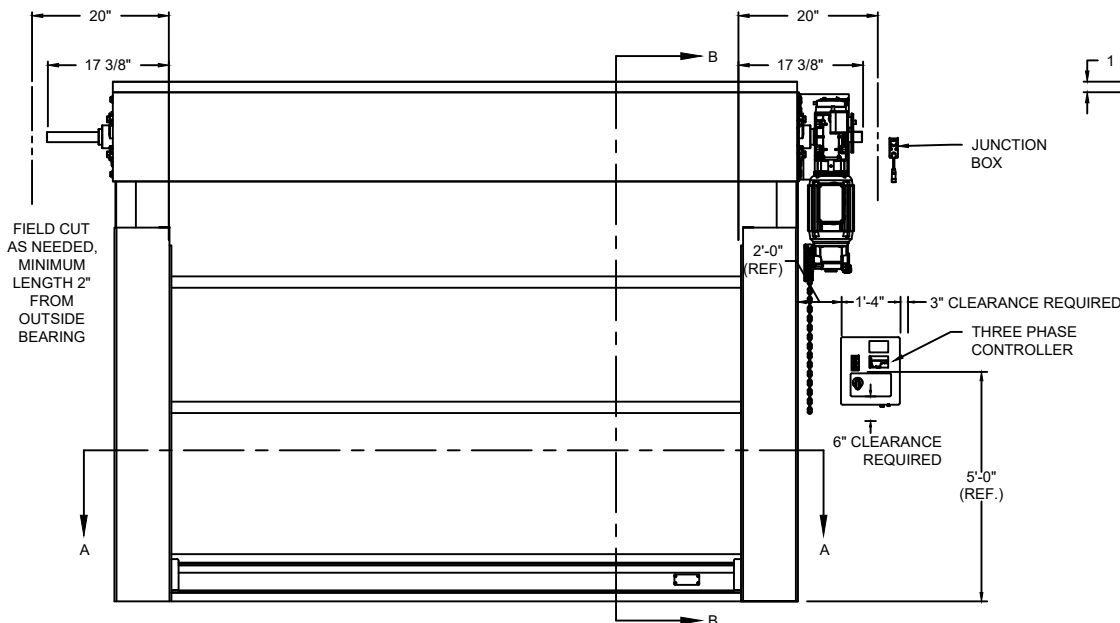

ELEVATION

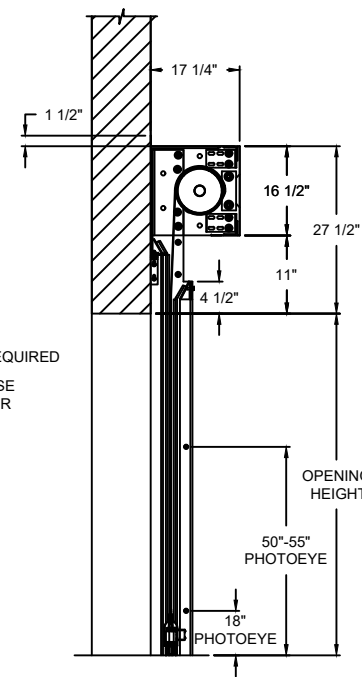

SECTION B-B

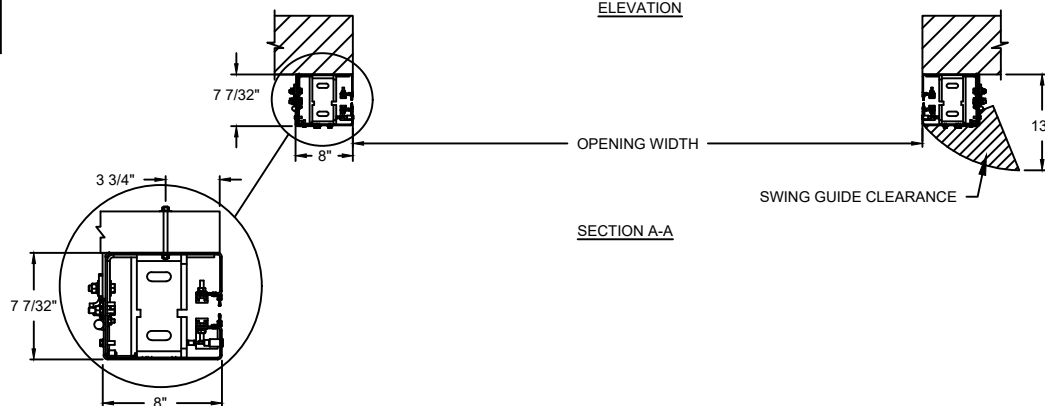

SECTION A-A


**DETAIL
JAMB FASTENERS**

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH	1. WINDLOAD 19 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. POWERHEAD DOOR
SHEET	BY:	



BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
993	20'	20'

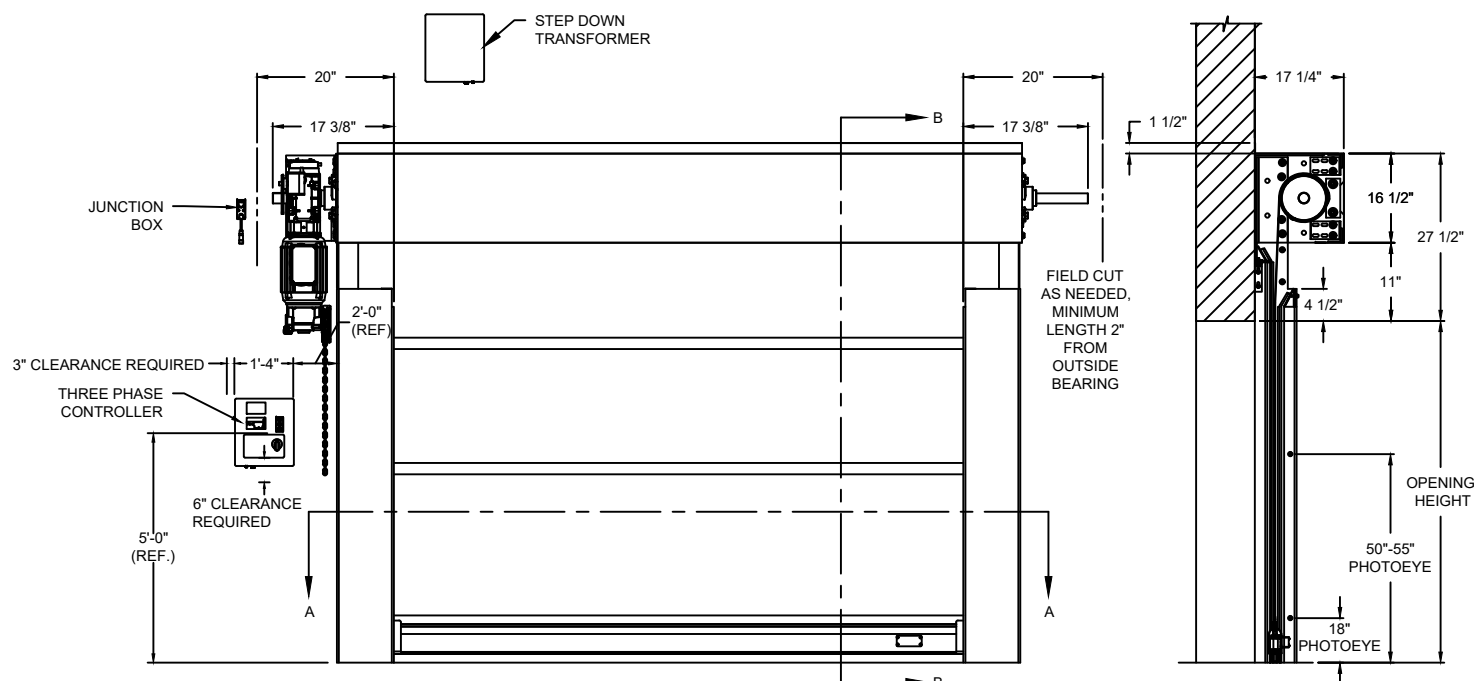

ELEVATION

SECTION B-B

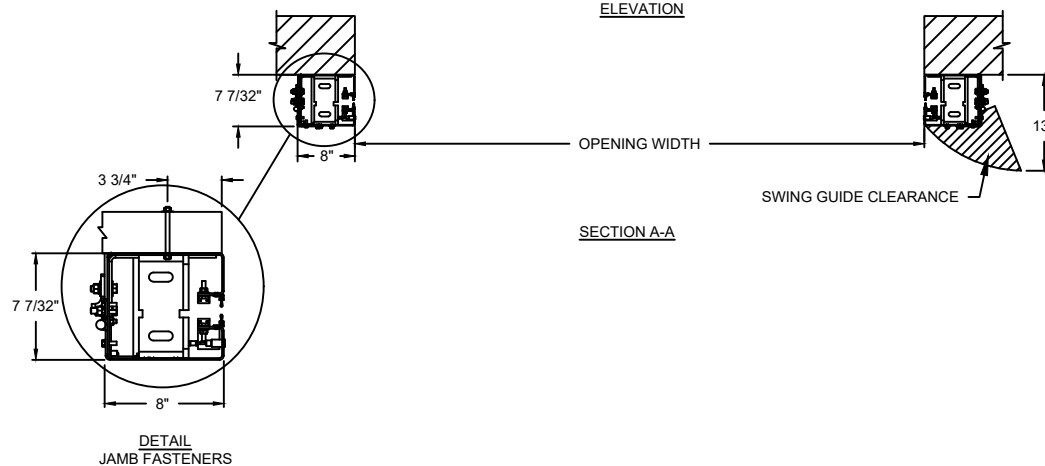

OPENING WIDTH

SWING GUIDE CLEARANCE

SECTION A-A


DETAIL
JAMB FASTENERS

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR LH 575V 3-PHASE	1. WINDLOAD 19 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		


RAPIDFLEX®

993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	




BOTTOM BAR DETAIL




STRUT DETAIL

OPTIONS


OPENING WIDTH*	
OPENING HEIGHT*	
WINDOW OPTIONS	☐ 20" H VISION
HOOD OPTIONS	☐ SLOPED ☐ STANDARD
HOUSING OPTIONS	☐ WITH MOTOR HOUSING ☐ WITHOUT MOTOR HOUSING

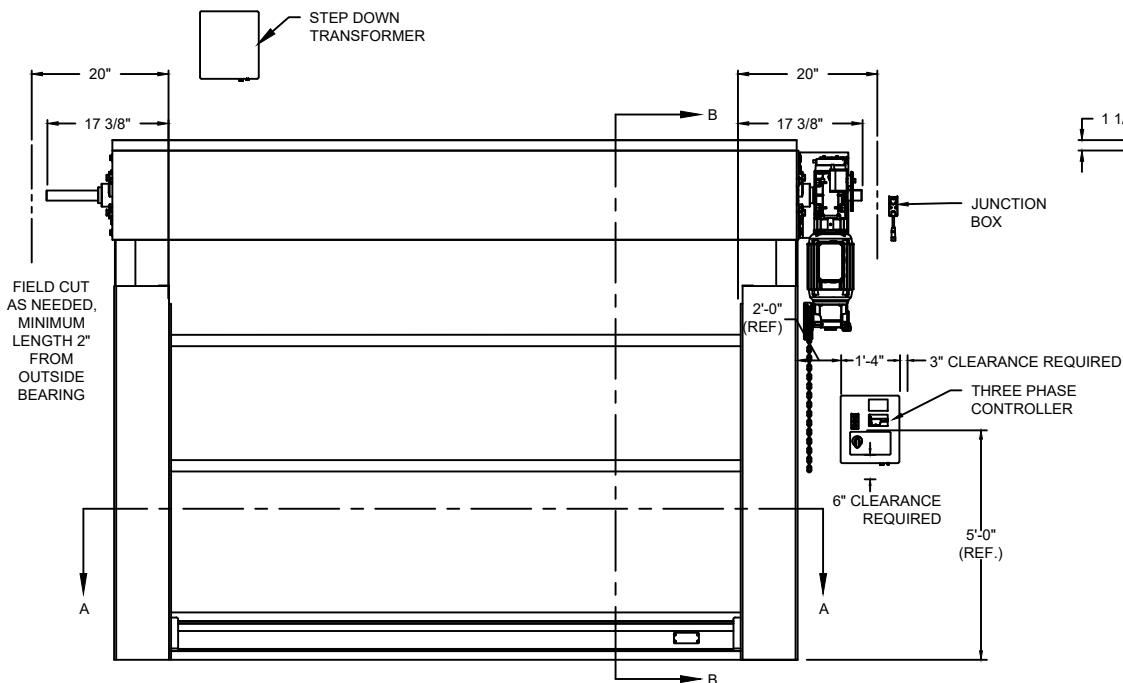

ELEVATION

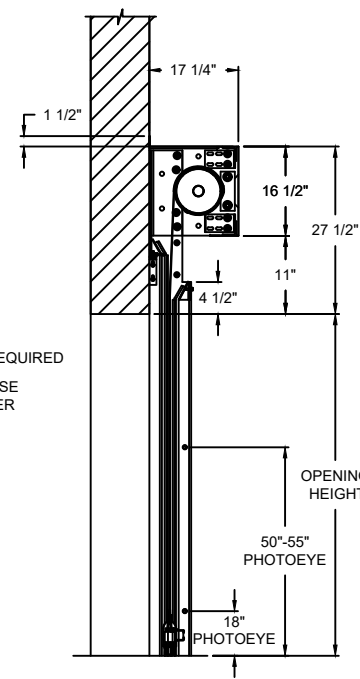

SECTION B-B

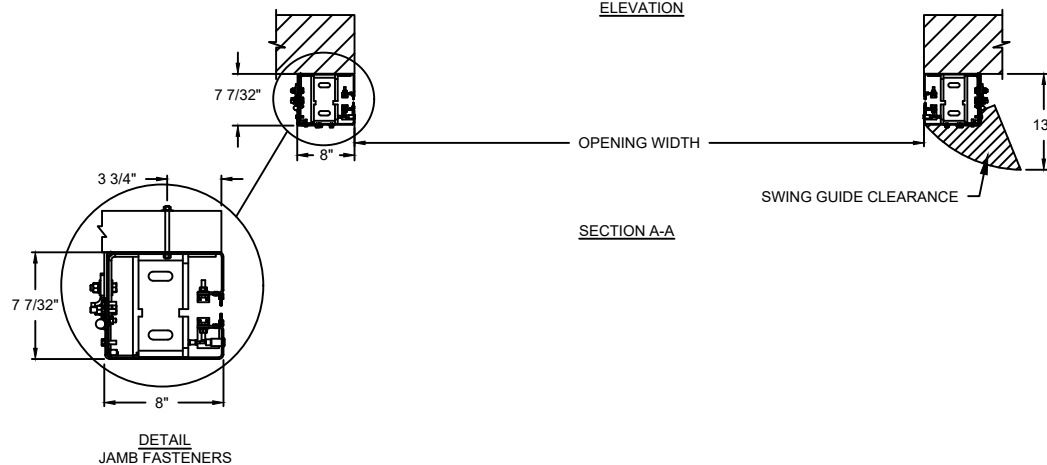

SECTION A-A

DETAIL
JAMB FASTENERS

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	22 GA. STEEL	MOTOR RH 575V 3-PHASE	1. WINDLOAD 19 P.S.F ULTIMATE @ 20' WIDE * PLEASE REFER TO WALL GUIDE FOR COMPLETE LIST OF BUILDING SPECIFICATIONS
CURTAIN	3 LAYER PVC COATED POLYESTER WITH 2 LAYERS POLYESTER WEAVE		
GUIDES	HIGH STRENGTH STEEL		
BOTTOM BAR	EXTRUDED ALUMINUM		

RAPIDFLEX®

993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	The Genuine. The Original. POWERHEAD DOOR
SHEET	BY:	

OPENING HEIGHT	# OF STRUTS
UP TO 7'3"	1
7'4" TO 10'1"	2
10'2" TO 12'11"	3
13'0" TO 15'9"	4
15'10" TO 18'7"	5
18'8" TO 20'0"	6

993 WALL GUIDE																	
BUILD HEIGHT (FT)	BUILD HEIGHT (IN)	WALL GUIDE HEIGHT (IN)	NUMBER OF SLOTS	SLOT*1	SLOT 2	SLOT 3	SLOT 4	SLOT 5	SLOT 6	SLOT 7	SLOT 8	SLOT* 9	SLOT 10	SLOT 11	SLOT* 12	SLOT 13	SLOT 14
5	60	87	5	2.00	20.00	38.00	62.00	68.00									
5.5	66	93	5	2.00	23.00	44.00	66.00	74.00									
6	72	99	6	2.00	14.00	26.00	50.00	74.00	80.00								
6.5	78	106	6	2.00	17.00	32.00	56.00	80.00	86.00								
7	84	113	6	2.00	20.00	38.00	62.00	86.00	92.00								
7.5	90	118	6	2.00	23.00	44.00	68.00	92.00	98.00								
8	96	123	7	2.00	14.00	26.00	50.00	74.00	98.00	104.00							
8.5	102	129	7	2.00	17.00	32.00	56.00	80.00	104.00	110.00							
9	108	135	7	2.00	20.00	38.00	62.00	86.00	110.00	116.00							
9.5	114	143	7	2.00	23.00	44.00	68.00	92.00	116.00	122.00							
10	120	147	8	2.00	14.00	26.00	50.00	74.00	98.00	122.00	128.00						
10.5	126	153	8	2.00	17.00	32.00	56.00	80.00	104.00	128.00	134.00						
11	132	159	8	2.00	20.00	38.00	62.00	86.00	110.00	134.00	140.00						
11.5	138	165	8	2.00	23.00	44.00	68.00	92.00	116.00	140.00	146.00						
12	144	171	9	2.00	14.00	26.00	50.00	74.00	98.00	122.00	146.00	152.00					
12.5	150	177	9	2.00	17.00	32.00	56.00	80.00	104.00	128.00	152.00	158.00					
13	156	183	9	2.00	20.00	38.00	62.00	86.00	110.00	134.00	158.00	164.00					
13.5	162	189	9	2.00	23.00	44.00	68.00	92.00	116.00	140.00	164.00	170.00					
14	168	195	10	2.00	14.00	26.00	50.00	74.00	98.00	122.00	146.00	170.00	176.00				
14.5	174	201	10	2.00	17.00	32.00	56.00	80.00	104.00	128.00	152.00	176.00	182.00				
15	180	207	10	2.00	20.00	38.00	62.00	86.00	110.00	134.00	158.00	182.00	188.00				
15.5	186	213	10	2.00	23.00	44.00	68.00	92.00	116.00	140.00	164.00	188.00	194.00				
16	192	219	11	2.00	14.00	26.00	50.00	74.00	98.00	122.00	146.00	170.00	194.00	200.00			
16.5	198	225	11	2.00	17.00	32.00	56.00	80.00	104.00	128.00	152.00	176.00	200.00	206.00			
17	204	231	11	2.00	20.00	38.00	62.00	86.00	110.00	134.00	158.00	182.00	206.00	212.00			
17.5	210	237	13	2.00	15.75	29.50	53.50	77.50	101.50	125.50	150.00	174.75	199.00	188.00	212.00	218.00	
18	216	243	13	2.00	18.75	35.50	59.50	83.50	107.50	131.50	155.50	180.00	204.00	194.00	218.00	224.00	
18.5	222	249	13	2.00	21.75	41.50	65.50	89.50	113.50	137.50	161.50	185.75	210.00	200.00	224.00	230.00	
19	228	255	13	2.00	24.75	47.50	71.50	95.50	119.50	143.50	167.50	192.00	216.00	206.00	230.00	236.00	
19.5	234	261	14	2.00	15.75	29.50	53.50	77.50	101.50	125.50	150.00	174.75	199.00	212.00	218.00	224.00	
20	240	267	14	2.00	18.75	35.50	59.50	83.50	107.50	131.50	155.50	180.00	204.00	216.00	218.00	224.00	240.00

1.5"

7.881"

4.5"

12.5"

6"

24" O.C.

2"

3.75" TYP

WALL GUIDE HEIGHT

SLOT 2

SLOT 3

NO SPLICE JAMB DETAIL
SHOWING 5 SLOTS

993 STRUTTED EXTERIOR HIGH SPEED FABRIC DOOR

DWG. NO.	DATE:	
SHEET	BY:	